




GANCI di SICUREZZA a FORCELLA e MAGLIA di CONNESSIONE

Accessori per imbrache GRADO 100

www.incofil.com


MAGLIA DI CONNESSIONE

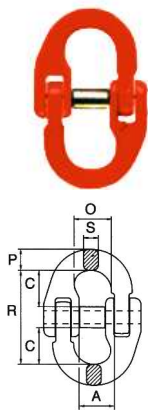

| Codice | catena | | misure | | | | | | peso | W.L.L. |
|--------|--------|------|--------|----|------|-----|------|------|------|--------|
| | Ø mm | Inch | A mm | C | O | R | P | S | Kg | Kg |
| ILX 06 | 6 | 1/4 | 16 | 18 | 16,5 | 43 | 7,2 | 6,8 | 0,07 | 1120 |
| ILX 07 | 7 | 9/32 | 18,5 | 20 | 20 | 49 | 8,5 | 7,7 | 0,10 | 1500 |
| ILX 08 | 8 | 5/16 | 22,7 | 26 | 25 | 70 | 9,4 | 9 | 0,25 | 2000 |
| ILX 10 | 10 | 3/8 | 25 | 32 | 27 | 77 | 12 | 11 | 0,35 | 3150 |
| ILX 13 | 13 | 1/2 | 30 | 35 | 32 | 85 | 15,5 | 15,5 | 0,68 | 5300 |
| ILX 16 | 16 | 5/8 | 33 | 40 | 39 | 103 | 21 | 21 | 1,10 | 8000 |
| ILX 20 | 20 | 3/4 | 44 | 48 | 47 | 116 | 23 | 23 | 1,70 | 12500 |
| ILX 22 | 22 | 7/8 | 49 | 51 | 55 | 133 | 26,5 | 26,5 | 2,20 | 15000 |

W.L.L.: carico max di utilizzo


GANCIO DI SICUREZZA A FORCELLA

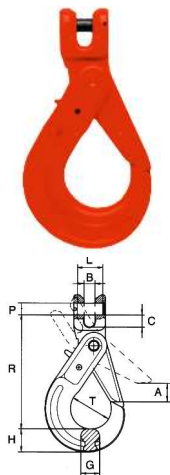

| Codice | catena | | misure | | | | | | | peso | W.L.L. | |
|---------|--------|----------|--------|----|----|----|----|-----|----|----------|--------|-------|
| | Ø mm | Inch | A mm | B | C | G | H | R | T | PxL | Kg | Kg |
| IRFX 06 | 5-6 | 7/32-1/4 | 28 | 7 | 8 | 16 | 21 | 94 | 35 | 7,5x17,5 | 0,50 | 1400 |
| IRFX 07 | 7 | 9/32 | 34 | 9 | 10 | 20 | 26 | 123 | 43 | 9x22,5 | 0,95 | 1900 |
| IRFX 08 | 8 | 5/16 | 34 | 9 | 10 | 20 | 26 | 123 | 43 | 10x22,5 | 0,95 | 2500 |
| IRFX 10 | 10 | 3/8 | 45 | 12 | 14 | 25 | 30 | 143 | 56 | 13x31,5 | 1,60 | 4000 |
| IRFX 13 | 13 | 1/2 | 51 | 15 | 17 | 35 | 40 | 180 | 69 | 16x42 | 3,20 | 6700 |
| IRFX 16 | 16 | 5/8 | 60 | 19 | 19 | 36 | 50 | 215 | 80 | 21x51,5 | 6,00 | 10000 |

W.L.L.: carico max di utilizzo

GANCIO A FORCELLA

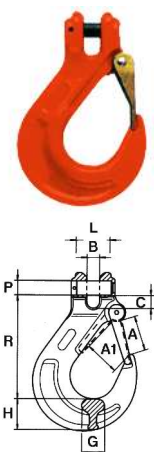

| Codice | catena | | misure | | | | | | | peso | W.L.L. | |
|----------|--------|----------|--------|----|-----|------|----|----|-----|----------|--------|-------|
| | Ø mm | Inch | A mm | A1 | B | C | G | H | R | PxL | Kg | Kg |
| IBX 06SF | 5-6 | 7/32-1/4 | 26 | 19 | 7,2 | 8 | 15 | 20 | 69 | 7,5x17,5 | 0,25 | 1400 |
| IBX 07SF | 7 | 9/32 | 34 | 26 | 9,5 | 10 | 19 | 28 | 95 | 9x22,5 | 0,55 | 1900 |
| IBX 08SF | 8 | 5/16 | 34 | 26 | 9,5 | 10 | 19 | 28 | 95 | 10x22,5 | 0,50 | 2500 |
| IBX 10SF | 10 | 3/8 | 40 | 31 | 12 | 13,5 | 25 | 33 | 110 | 13x29,5 | 1,00 | 4000 |
| IBX 13SF | 13 | 1/2 | 51 | 40 | 15 | 17 | 30 | 40 | 136 | 16x37 | 1,70 | 6700 |
| IBX 16SF | 16 | 5/8 | 56 | 45 | 18 | 22 | 37 | 48 | 155 | 20x52 | 3,20 | 10000 |
| IBX 20SF | 20 | 3/4 | 60 | 53 | 23 | 25 | 51 | 52 | 185 | 24x73 | 5,00 | 16000 |
| IBX 22SF | 22 | 7/8 | 66 | 62 | 25 | 32 | 50 | 63 | 210 | 26x72 | 12,3 | 19000 |

W.L.L.: carico max di utilizzo